

# WM TELESCOPIC

PRACTICAL, EASY  
TO USE MOBILE  
TELESCOPIC RAMP. IN  
PERFORATED ANTI-  
SLIP ALUMINIUM  
WITH SAFETY EDGES.



**LOAD CAPACITY**  
300 kg per pair



**STANDARD  
DIMENSIONS**  
Width 18.5 cm  
Length 150, 200, 225,  
250 and 300 cm



**HANDLING**  
Mobile



**COLOUR**  
Yellow


LOAD CAPACITY: UP TO 300 KG PER PAIR OF RAMPS



Anodised aluminium  
perforated platform



Adjustable floor  
contact flap




Safety edges  
(5.5 cm)



Transport  
handle



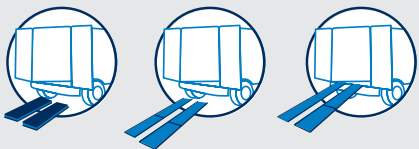

## REMOVABILITY AND TRANSPORT

The WM Telescopic is unique in the way it can be extended to the required length. This ramp offers a rest-on, folding contact plate for safe and secure loading. These can be supplied individually or as a pair as required.

## OPTIONAL EXTRAS



### ECO VERSION

ECO version also available: unperforated loading platform, without taper in the contact flap and without yellow colour on safety edges.

## APPLICATION SECTORS




DISABLED USERS  
PASSENGER  
TRANSPORT



MOTORBIKES  
BICYCLES





MEDICAL  
AMBULANCES

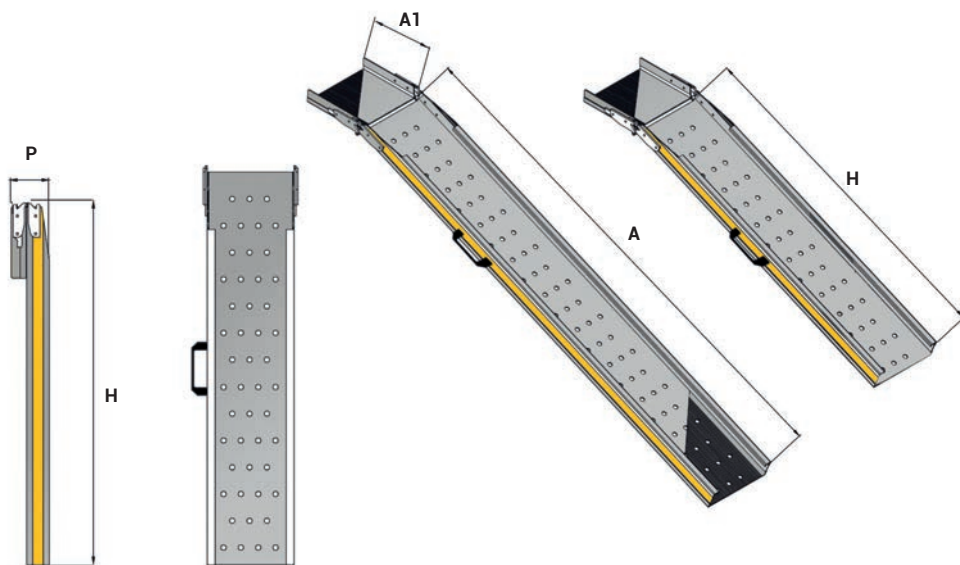

### CONTACT FLAP:

- TAPERED
- WITH 4 HEIGHT SETTINGS
- REST-ON (20 CM CONTACT LENGTH ON PLATFORM)
- FOLDING

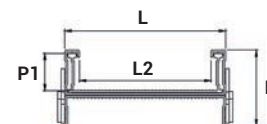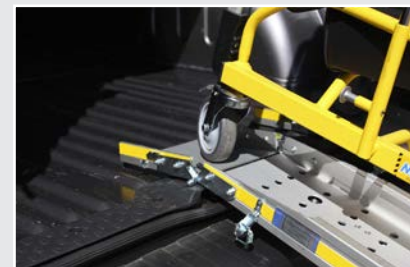

ALL MODELS	A (mm)	A1 (mm)	L (mm)	L2 (mm)	H (mm)	P (mm)	P1 (mm)	Load capacity per pair (kg)	Weight (kg)
WM TELESCOPIC	1500	200	225	185	900	106	55	300	5
WM TELESCOPIC	2000	200	225	185	1150	106	55	300	6
WM TELESCOPIC	2250	200	225	185	1275	106	55	300	6,5
WM TELESCOPIC	2500	200	225	185	1400	106	55	300	7
WM TELESCOPIC	3000	200	225	185	1650	106	55	300	8