




LOADING RAMPS

Tailored loading and unloading solutions

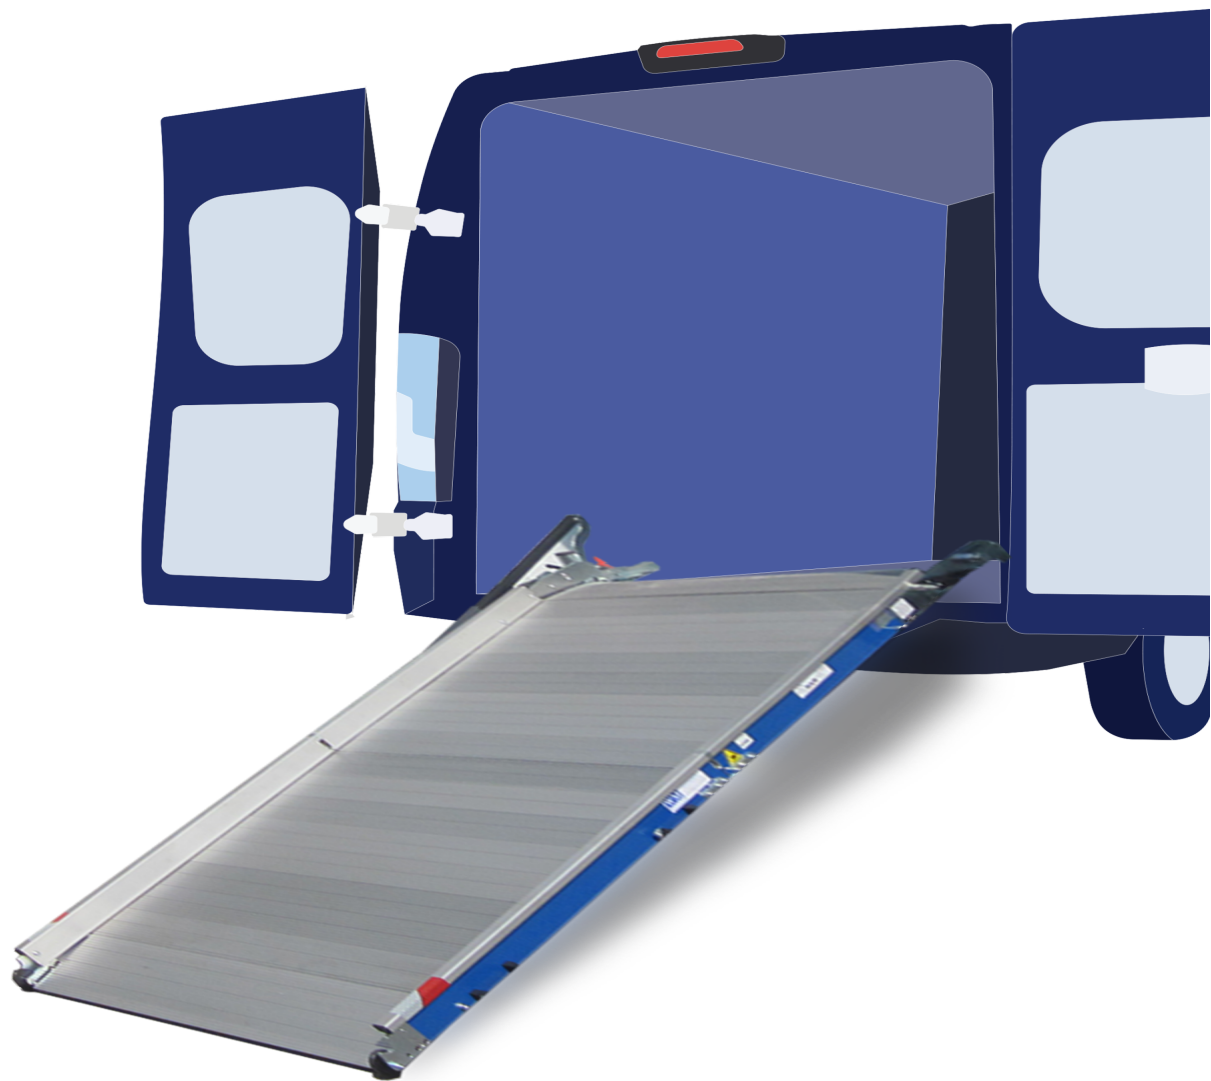

Our Loading Ramps

Our ramps are designed to adapt to the loading and unloading operations, meeting the needs of your vehicle and your industry.



11 UNIQUE RAMP MODELS

Made of high-quality aluminum and designed in Italy, our loading ramps offer modular and customizable solutions designed to ensure safety, durability and optimal performance.

OUR RAMPS

ALL RAMPS HAVE



All of our ramps
are TÜV certified



Approval
not required



100%
Made in Italy



2 years of
warranty

WHY CHOOSE OUR RAMPS

Flexibility:

A complete range of manual ramps for every sector and need;

Quality:

Guaranteed by in-house production processes (welding and CNC machining) that ensure robustness and durability;


Time saving:

The operator can upload and unload independently;

Safety:

Ramps improve working conditions reduce operational risks;

**WITH MORE THAN 100 RESELLERS WORLDWIDE,
OUR SOLUTIONS ARE WHEREVER YOU NEED THEM.**

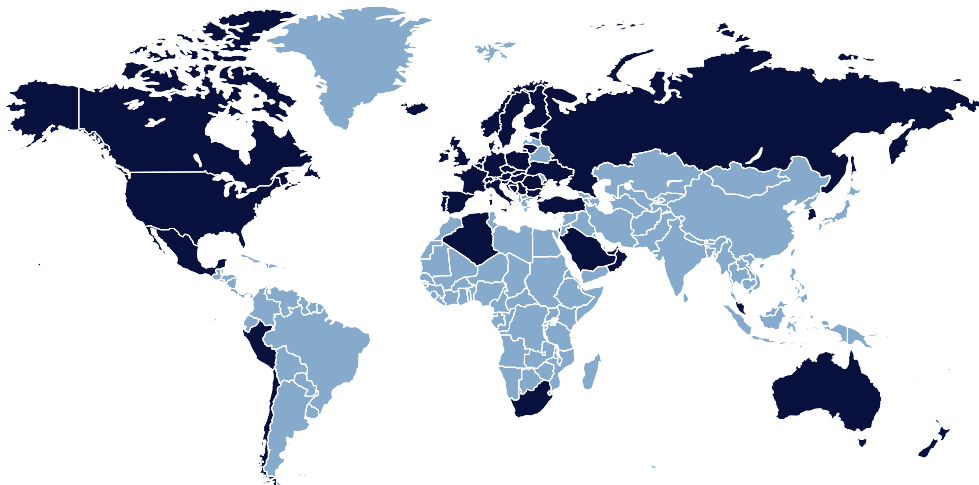

WM LIGHT

DESCRIPTION:

Removable loading ramp. It is the most versatile model in the WM range and is very well suited to light loads of up to 400 kg.



FEATURES



Capacity:
400kg



Handling:
External and internal rotation







Custom size:
Width 40 to 105 cm,
Length 150 to 325 cm

- Almond-shaped aluminum surface non-skid.
- Wheel for easy opening.
- Self-leveling legs.
- Adjustable band that connects with surfaces.





OPENING AND CLOSING:

An external rotation kit that allows the ramp to open vertically, like a second door, is available upon request.

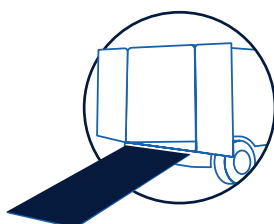

WM LIGHT

EXAMPLES OF POSSIBLE CONFIGURATIONS

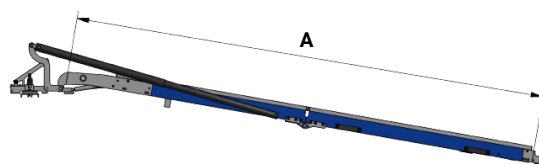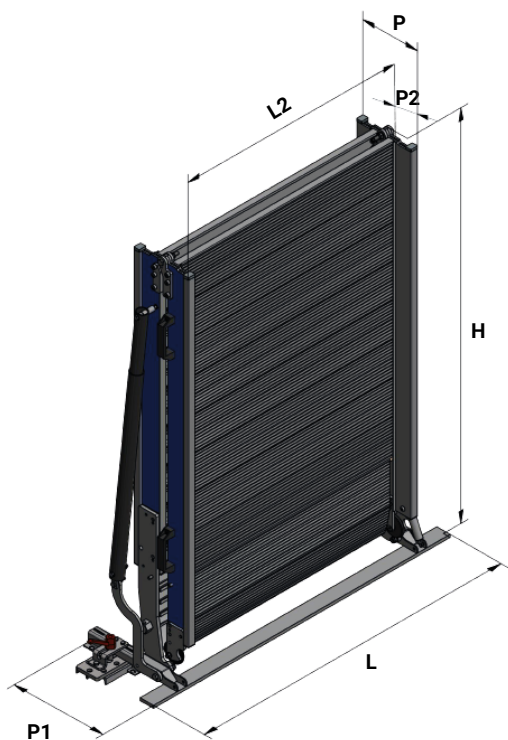

L2 (mm)	A (mm)	L (mm)	H (mm)	P (mm)	P1 (mm)	P2 (mm)	Capacity (Kg)	Weight* (Kg)
600	2000	900	1090	203	345	60	400	46
650	2250	950	1215	203	345	60	400	51
700	2000	100	1090	203	345	60	400	49
750	2500	1050	1340	203	345	60	400	58
800	2750	1100	1465	203	345	60	400	64
800	3000	1100	1590	203	345	60	400	68
800	3250	1100	1715	203	345	60	400	72
850	2500	1150	1340	203	345	60	400	62
850	3250	1150	1715	203	345	60	400	75
900	3000	1200	1590	203	345	60	400	73
950	2750	1250	1465	203	345	60	400	71
1000	2500	1300	1340	203	345	60	400	68
1000	2750	1300	1465	203	345	60	400	73
1000	3000	1300	1590	203	345	60	400	78
1050	3250	1350	1715	203	345	60	400	85

* The indicated weight does not include the 5 kg mounting kit. Optional external rotation weighs + 6 kg

WM LIGHT

OPTIONAL




EXTERNAL ROTATION

Rotation kit that allows the ramp to be rotated outward from the van by 90°. It allows access to the vehicle compartment without using the platform.



BRIDGE USE

Reduces the angle of inclination for 3-piece folding ramps, ideal for small vehicles. Available for load capacities up to 1,000 kg, with a maximum width of 100 cm and a fixed length of 80 cm.

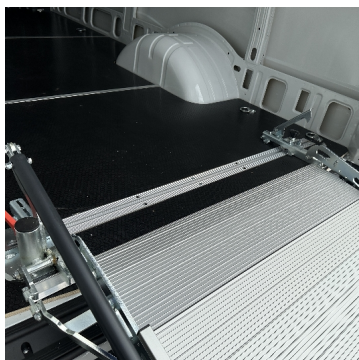

3 TYPES OF MOUNTING

- Fixed assembly
- 2-plate assembly
- Assembly with full bar



PLAN VERSIONS

It is possible to have the ramp with a perforated aluminum surface featuring alternating convex holes, model WM LIGHT-R. The surface is more slip-resistant and the load capacity remains 400kg. Alternatively, you can have a surface in stretched aluminum mesh, referred to as the WM LIGHT-R version, with a load capacity of 300kg.

WM LIGHT

